


SIZE	Ød	L±2	H1	H±4	W±4	BL	X	Cv FACTOR	TORQUE kgf·cm	KGS
1/4"	9.2	40	19	44	78	M6	4	6.6	36	0.115
3/8"	12.5	42	23	47	78	M6	4	7.9	36	0.14
1/2"	15	50	24	52	87	M8	5	11.2	48	0.21
3/4"	20	60	31	57	95	M8	5	21	66	0.325
1"	25	70	36	65	120	M10	6.5	35	94	0.515
1-1/4"	32	85	40	70	120	M10	6.5	57	122	0.8
1-1/2"	38	90	50	85	157	M12	8.5	80	162	1.24
2"	50	105	58	92	157	M12	8.5	148	225	2
2-1/2"	65	140	73	125	219	M16	12	265	432	4.655
3"	80	158	84	137	219	M16	12	415	675	6.905
4"	100	200	103	168	318	M24	14	780	990	13.24

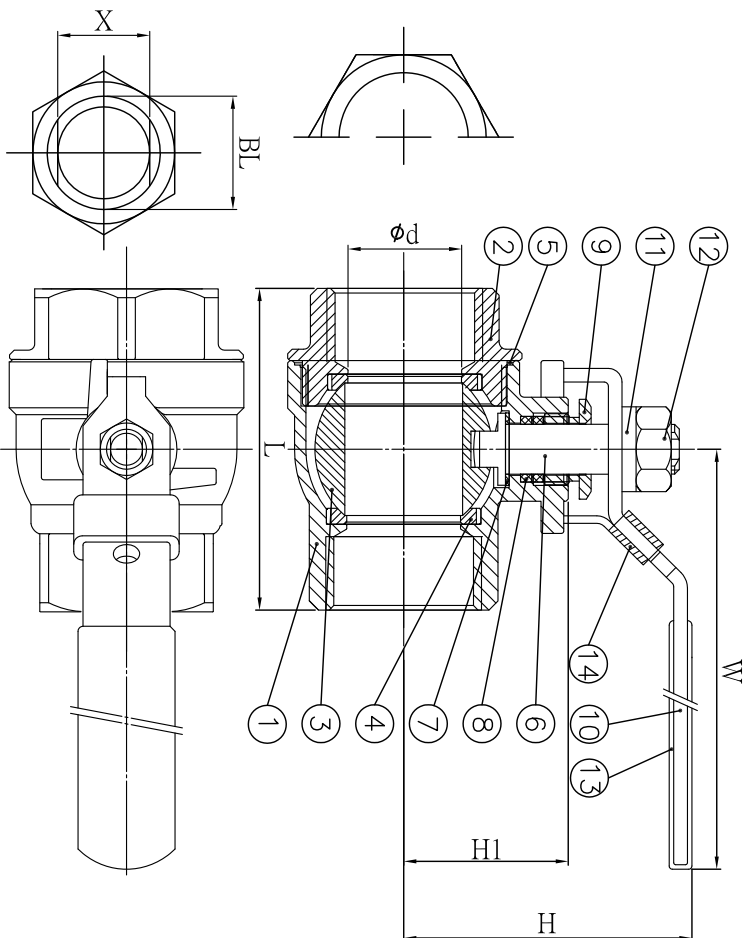

ITEM	PARTS	QTY	MATERIALS		
			A2NS-316	A2NS-304	A2NS-WCB
1	BODY	1	ASTM-A351-CF8M	ASTM-A351-CF8	ASTM-A216-WCB
2	CAP	1	ASTM-A351-CF8M	ASTM-A351-CF8	ASTM-A216-WCB
3	BALL	1	ASTM-A351-CF8M	ASTM-A351-CF8	ASTM-A351-CF8
4	BALL SEAT	2	PTFE	PTFE	PTFE
5	JOINT GASKET	1	PTFE	PTFE	PTFE
6	STEM	1	AISI 316	AISI 304	AISI 304
7	THRUST WASHER	1	PTFE	PTFE	PTFE
8	STEM PACKING	2	PTFE	PTFE	PTFE
9	GLAND NUT	1	AISI 304	AISI 304	AISI 304
10	HANDLE	1	AISI 430	AISI 430	AISI 430
11	SPRING WASHER	1	AISI 304	AISI 304	AISI 304
12	STEM NUT	1	AISI 304	AISI 304	AISI 304
13	PLASTIC	1	P.V.C	P.V.C	P.V.C
14	LOCK DEVICE	1	AISI 430	AISI 430	AISI 430

										 VALTEK (Shanghai) IND. CO., LTD.	
		 SUPPORT SUPPORT CENTER S									