



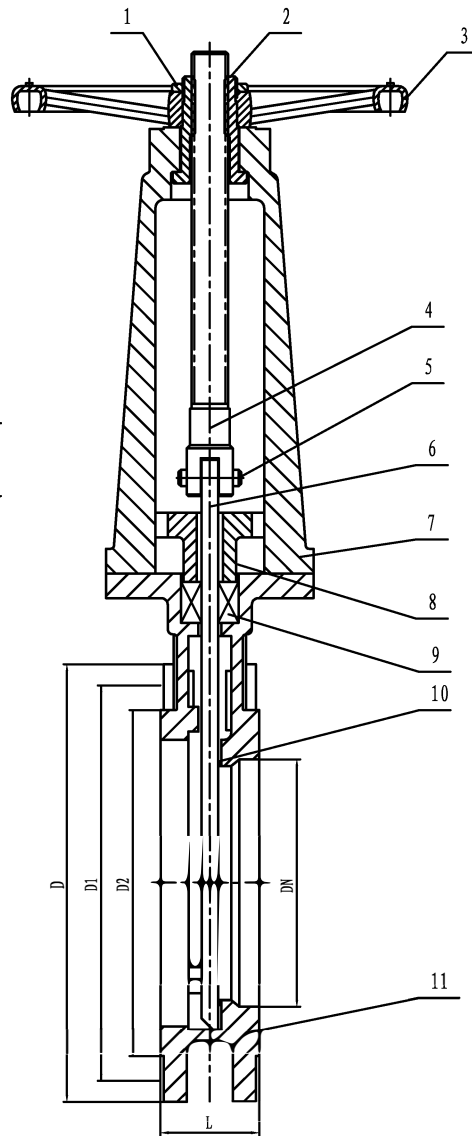

Technical standard

nominal pressure	150LB
strength test pressure	3.0 MPa
Sealing test pressure	2.2 MPa
Temperature	≤200 ℃
Used for sewage, coal powder, slag, pulp, etc	

1. Design and manufacturing standard: MSSSP-81
2. Structure length standard: MSSSP-81
3. Flange connection standard: ASMEB16.5
4. Inspection and Test Standard: API598

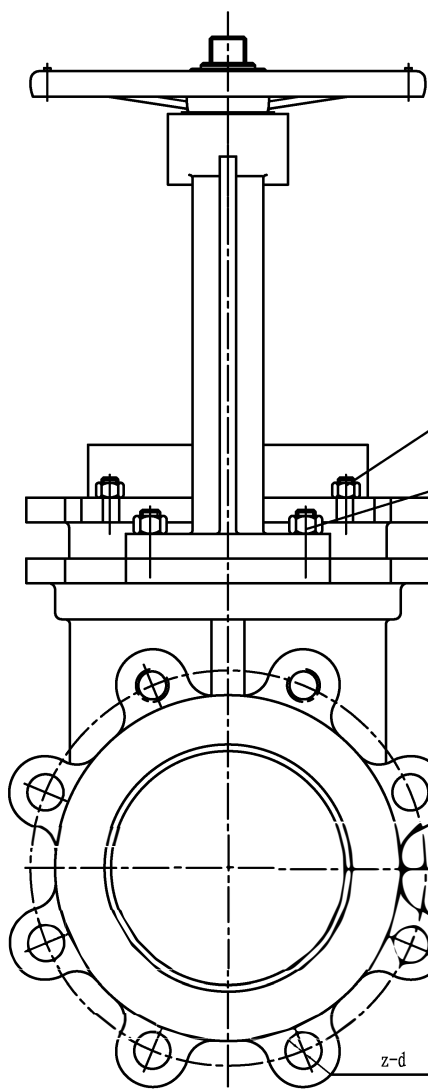

NPS	DN	L	D	D1	D2	z-d
4"	100	50	230	190.5	157.2	8-19
6"	150	55	280	241.3	215.9	8-22
8"	200	60	345	298.5	269.9	8-22

15	Stud bolt	4	316	
14	Nut	4	316	
13	Stud bolt	4	316	
12	Nut	4	316	
11	Body	1	CF8M	
10	sealing ring		PTFE	
9	Packing	4	Flexible graphite	
8	Packing gland	1	CF3M	
7	Yoke	1	CF3M	
6	Gate	1	316	
5	Pin	1	316	
4	Stem	1	316	
3	Handweel	1	KTH330	
2	Stem Nut	1	ZCuAl10Fe3	
1	Round nut	1	316	
Part name		QTY	MATERIAL	

				knife gate valve			
标记	数量	更改文件号	签字	日期	图样标记		
设计		标准			A		
校对		审定					
审核							
工艺		日期					
				共	第	PZ73W-150LBRL	